



Square Tapered Steel

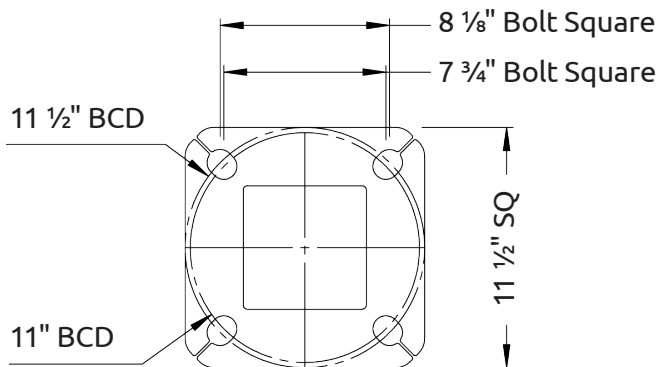


NSQT Type A
(1" Anchor Bolts)

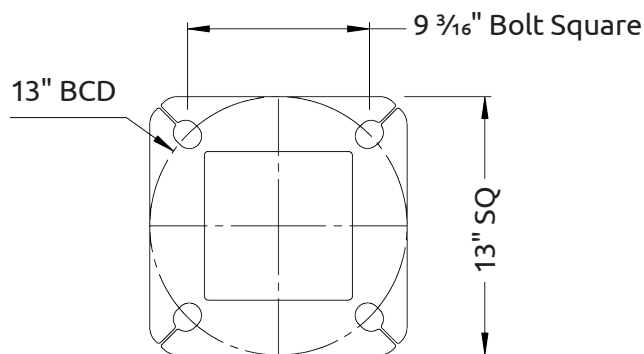

NSQT Type B
(1" Anchor Bolts)

- Hand hole ring mounting height is 12" to centre and comes with (4"x7") hand hole cover
- Wind speeds (mph) in the table denote the maximum wind gust speed at the project site (i.e. gust factor included).
- Maximum EPA rating includes fixture(s) and supporting arm(s) and is for standard pole installation on concrete bases/footings.
- All poles are supplied with nut covers, shims and top plastic cap.
- Pole designs based on AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals.
- Contact Sales Team for custom sizes and/or applications.
- Specific information and details may be subject to change without notice.
- Please see [Warranty](#) and [Terms & Conditions](#).



CATALOGUE #				FIXTURE INFO	
PROJECT NAME					
CITY					
PREPARED BY		DATE			
COMMENTS					
				QUANTITY	
				EPA (sq.ft.)	
				WEIGHT (lbs)	

Catalogue #	Pole Height (ft)	Pole Weight (lbs)	Anchor Bolt Diameter (in)	Base Plate Type	Maximum EPA (sq.ft.)			
					80MPH	90MPH	100MPH	110MPH
NSQT12	12	125	1	A	45.0	35.5	28.5	23.0
NSQT16	16	160	1	A	36.0	28.5	22.5	18.0
NSQT20	20	196	1	A	31.0	24.0	18.5	14.5
NSQT25	25	259	1	B	25.5	19.0	14.5	11.0
NSQT30	30	317	1	B	20.5	15.5	11.5	8.5
NSQT35	35	541	1	B	32.0	24.5	18.5	14.5
NSQT40	40	586	1	B	25.0	19.0	14.0	10.0

Order Entry Info				
HEIGHT (ft)	MOUNTING TYPE <i>(See Note 1)</i>	FINISH TYPE	PC COLOUR	OPTIONS <i>(Click descriptions to view product)</i>
12	 TOP TENON MOUNT TT238 - 2 3/8" x 5" tenon TT278 - 2 7/8" x 5" tenon TT350 - 3 1/2" x 5" tenon	PC - Powder Coated	WHT - White (RAL-9003)	☐ DUPR - 1110 Box Provision (Festoon Box) ☐ DUPRGFI - 1110 Box Provision c/w 15A 120V GFI Receptacle and Weatherproof Cover ☐ HHSS - Hand Hole Security System ☐ FBA1 - Flower Basket Arm One Side <i>(See Note 2)</i> ☐ FBA2 - Flower Basket Arm Dual <i>(See Note 2)</i> ☐ BA1 - Banner Arms One Side <i>(See Note 3)</i> ☐ BA2 - Banner Arms Dual <i>(See Note 3)</i> ☐ AB - Anchor Bolts ☐ BH - Bullhorns ☐ N - None
16		NTPC - Nova Tuff Powder Coated <i>(Colour Chart)</i>	BLK - Black (BK50)	
20	 SIDE TENON MOUNT <i>Dimensions: 2 3/8" dia. x 5" long</i> ST1 - Single Head ST2180 - 2 Heads at 180 ST290 - 2 Heads at 90 ST390 - 3 Heads at 90 ST3120 - 3 Heads at 120 ST490 - 4 Heads at 90	GALV - Galvanized	DBZ - Dark Bronze (RAL-8019)	
25		GALVPC - Galvanized and Powder Coated	GRY - Grey (RAL-7040)	
30	 DRILL PATTERN DP1 - Single Head DP2180 - 2 Heads at 180 DP290 - 2 Heads at 90 DP390 - 3 Heads at 90 DP3120 - 3 Heads at 120 DP490 - 4 Heads at 90 N - None	GALVNT - Galvanized and Nova Tuff Powder Coated	GRN - Green (RAL-6005)	
35		<i>For PC or GALVPC, please select Colour from next column</i> <i>For Nova Tuff, please provide RAL# under CC</i>	CC - Custom Colour (RAL-) <i>(Additional charges may apply)</i>	
40			N - None	
Height	Mounting	Finish Type	PC Colour	Options
NSQT				

Note 1: Please provide fixture cutsheet.

Note 2: Please provide basket weight, arm length and mounting height.

Note 3: Please provide banner size and mounting height.

Sample Catalogue #: NSQT20-ST1-GALVPC-BLK-HHSS-BA1

Reset Order Entry Form